


- 5MP @43 fps
- USB 3.0 interface with plug and play capability, USB3.0 power supply
- Compatible with USB3 Vision Protocol, GenICam Standard, and the third-party software based on these protocol and standard
- Support Windows、Linux
- 128 MB local memory for burst transmission and retransmission



Applied range • Defect Detection • Surface Patch Detection • Visual Positioning • Size Measuring • QR Code Reading • VR/AR • Logistics

Camera	Mars5000X-43um/uc
Resolution [H*V]	2592 × 2048
Sensor	XGS5000
Sensor Size	2/3"
Sensor Technology	Global, CMOS
Pixel Size [μm]	3.2 × 3.2
Frame Rate [fps]	43
Data Bit	12bit
Exposure Time	28μs~1s
Dynamic Range	Mono:64dB Color:71dB
Mono/Color	Mono/Color
Image Format	Mono:Mono8/10/10Packed Color:BayerRG8/10/10P;BayerGB8/10/10P
Interface	USB 3.0
Synchronization	Via hardware trigger、software trigger or free run mode
Housing Size [l*w*h]	29.0 × 29.0 × 29.0 mm (60g)
Operating Temperature	-30~80 ° C (Storage), -30~50° C (Working)
Lenses Mount	C-Mount
Digital I/O	Opto-isolated input x 1, opto-isolated output x 1, and bi-directional custom non-isolated I/O x 1
Power Input	DC 9-24V, Supporting USB
Power Consumption	Mono:12V@ ≈ 3.9W Color:12V@ ≈ 3.2W
Driver	Mars Series Camera Software Suite or 3rd party USB3 Vision Software
Operating System	Windows, Linux
Conformity	USB3 Vision, GenICam

Spectral Response

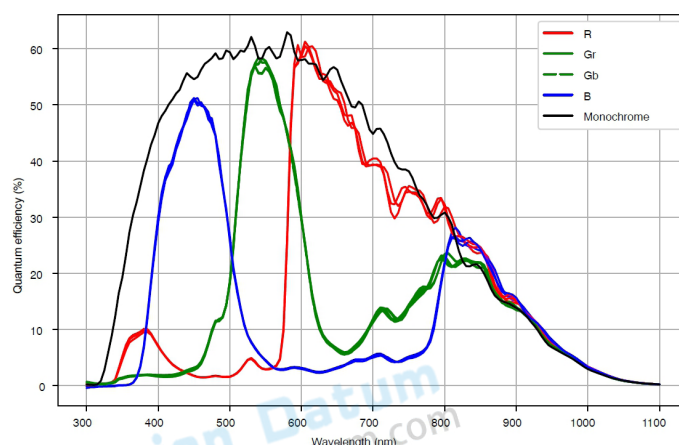

Dimensions

